


SE-01F 翻边轴套规格及公差

SE-01F Flange Bushing Specification & Tolerance

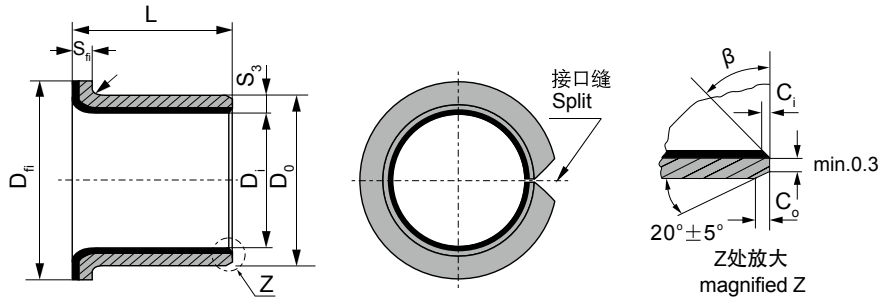

S ₃	1.0	1.5	2.0	2.5
r	1 ^{±0.5}	1 ± 0.5	1.5 ± 0.5	2 ± 0.5

单位Unit: mm

轴径(f7) Shaft D _s	座孔(H7) Housing D _H	(OD) 外径公差 Tolerance D _O	(ID)压装后 内孔公差 After fixed D _{ia}	配合间隙 Clearance C _O	Designation 型号规格	Wall thickness 壁厚 S ₃	尺寸 Dimension				
							D _i	D _o	D _i ± 0.5	L ± 0.25	S _{fi} ± 0.2
6	8	8	6.055 5.990	0.077 0.000	SE-01FF06040	1.005	6	8	12	4	1
					SE-01FF06070						
8	10	10	8.055 7.990	0.083 0.003	SE-01FF08055	0.980	8	10	15	5.5	1
					SE-01FF08075					7.5	
10	12	12	10.058 9.990	0.086 0.003	SE-01FF10070	1.005	10	12	18	7	1
					SE-01FF10090					9	
					SE-01FF10120					12	
12	14	14	12.058 11.990	0.092 0.006	SE-01FF12070	0.980	12	14	20	7	1
					SE-01FF12090					9	
					SE-01FF12120					12	
					SE-01FF14120					12	
14	16	16	14.058 13.990	0.092 0.006	SE-01FF14170	1.005	14	16	22	17	1
					SE-01FF15090					9	
					SE-01FF15120					12	
15	17	17	15.058 14.990	0.092 0.006	SE-01FF15170	0.980	15	17	23	17	1
					SE-01FF16120					12	
16	18	18	16.058 15.990	0.092 0.006	SE-01FF16170	1.005	16	18	24	17	1
					SE-01FF18120					12	
					SE-01FF18170					17	
18	20	20	18.061 17.990	0.095 0.006	SE-01FF18200	0.980	18	20	26	20	1
					SE-01FF20115					11.5	
					SE-01FF20165					16.5	
20	23	23	20.071 19.990	0.112 0.010	SE-01FF20215	1.505	20	23	30	21.5	1.5
					SE-01FF22150					15	
					SE-01FF22200					20	
22	25	25	22.071 21.990	0.112 0.010	SE-01FF25115	1.475	22	25	32	20	1.5
					SE-01FF25165					16.5	
					SE-01FF25215					21.5	
25	28	28	25.071 24.990	0.126 0.010	SE-01FF30160	2.005	25	28	35	16.5	2
					SE-01FF30260					26	
					SE-01FF35160					16	
30	34	34	30.085 29.990	0.135 0.015	SE-01FF35260	1.970	30	34	42	26	2
					SE-01FF40260					26	
					SE-01FF40400					40	
35	39	39	35.085 34.990	0.135 0.015	SE-01FF40260	2.005	35	39	47	26	2
					SE-01FF40400					40	
40	44	44	40.085 39.990	0.135 0.015	SE-01FF40260	1.970	40	44	53	26	2
					SE-01FF40400					40	