


SE-08G 固体润滑轴承规格及公差 SE-08G Solid-lubricant Bushing Specification & Tolerance

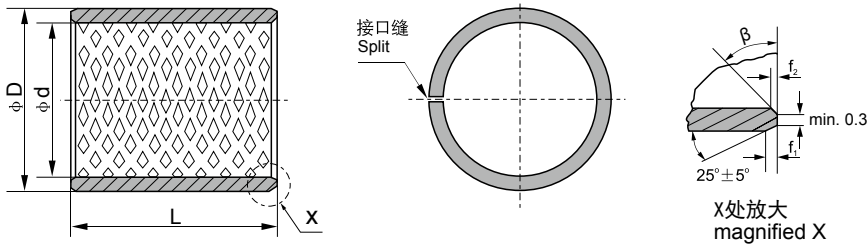

单位 Unit: mm

d	D	f_1	f_2	$L_{-0.40}^0$															
				10	15	20	25	30	35	40	50	60	70	80	90	100			
10	12	0.3	0.5	1010	1015	1020													
12	14			1210	1215	1220													
14	16			1410	1415	1420	1425												
15	17			1510	1515	1520	1525												
16	18			1610	1615	1620	1625												
18	20			1810	1815	1820	1825												
20	23	0.8	0.4	2010	2015	2020	2025												
22	25			2210	2215	2220	2225	2230											
24	27				2415	2420	2425	2430											
25	28				2515	2520	2525	2530											
28	32				2815	2820	2825	2830											
30	34			1.0	0.6		3015	3020	3025	3030	3035	3040							
32	36		3215			3220	3225	3230	3235	3240									
35	39		3515			3520	3525	3530	3535	3540									
40	44					4020	4025	4030	4035	4040	4050								
45	50	1.2	0.8				4520	4525	4530	4535	4540	4550							
50	55						5020	5025	5030	5035	5040	5050	5060						
55	60				5520	5525	5530	5535	5540	5550	5560								
60	65					6025	6030	6035	6040	6050	6060	6070							
65	70						6530	6535	6540	6550	6560	6570							
70	75							7030	7035	7040	7050	7060	7070	7080					
75	80	1.4	0.8			7530	7535	7540	7550	7560	7570	7580							
80	85					8030	8035	8040	8050	8060	8070	8080							
85	90							8540	8550	8560	8570	8580	8590						
90	95								9040	9050	9060	9070	9080	9090					
95	100									9550	9560	9570	9580	9590	95100				
100	105										10050	10060	10070	10080	10090	100100			
105	110								10550	10560	10570	10580	10590	105100					
110	115								11050	11060	11070	11080	11090	110100					
115	120								11550	11560	11570	11580	11590	115100					
120	125									12060	12070	12080	12090	120100					
125	130									12560	12570	12580	12590	125100					
130	135									13060	13070	13080	13090	130100					
135	140									13560	13570	13580	13590	135100					
140	145									14060	14070	14080	14090	140100					
145	150									14560	14570	14580	14590	145100					
150	155									15060	15070	15080	15090	150100					
155	160									15560	15570	15580	15590	155100					
160	165									16060	16070	16080	16090	160100					