


SE-500B 自润滑翻边轴承标准公制尺寸 SE-500B Self-lubricating Flange Bearings Standard Metric Size

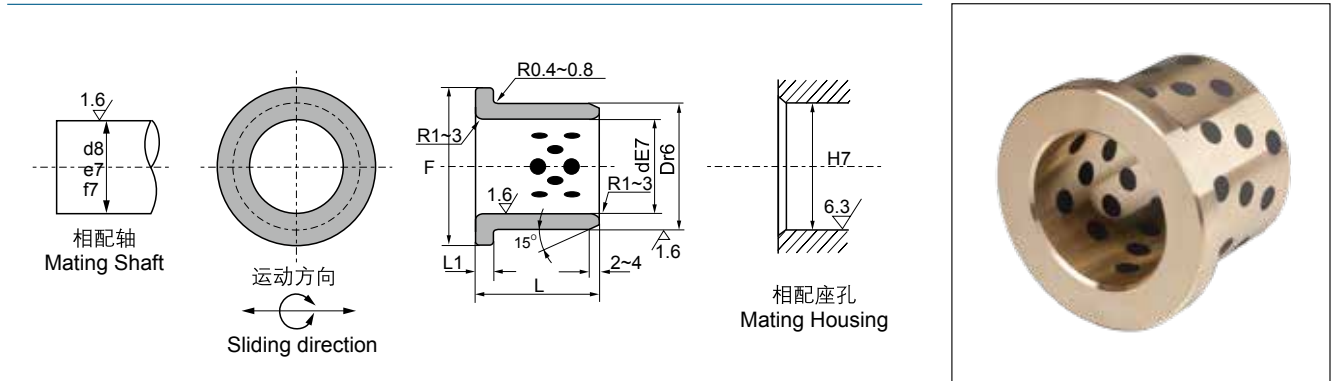

单位Unit: mm

d	D	d E7	D r6	F	L ₁	L ^{-0.10} _{-0.30}														
						15	20	25	30	35	40	50	60	80	100					
10	14	10	^{+0.040} / _{+0.025}	14	^{+0.034} / _{+0.023}	22	2	1015	1020											
12	18	12		18		25		1215	1220											
13	19	13		19		26		1315	1320											
14	20	14	^{+0.050} / _{+0.032}	20		27	3	1415	1420	1425										
15	21	15		21	^{+0.041} / _{+0.028}	28		1515	1520	1525	1530									
16	22	16		22		29		1615	1620	1625	1630									
20	30	20		30		40			2020	2025	2030	2035								
25	35	25	^{+0.061} / _{+0.040}	35		45			2520	2525	2530	2535	2540							
30	40	30		40	^{+0.050} / _{+0.034}	50			3020	3025	3030	3035	3040	3050						
35	45	35		45		60				3525	3530	3535	3540	3550						
40	50	40	^{+0.075} / _{+0.050}	50		65	5				4030	4035	4040	4050						
45	55	45		55		70					4530	4535	4540	4550	4560					
50	60	50		60	^{+0.060} / _{+0.041}	75						5035	5040	5050	5060					
55	65	55		65		80							5540	5550	5560					
60	75	60		75	^{+0.062} / _{+0.043}	90							6040	6050	6060	6080				
70	85	70	^{+0.090} / _{+0.060}	85		105	7.5							7050	7060	7080				
75	90	75		90	^{+0.073} / _{+0.051}	110								7550	7560	7580	75100			
80	100	80		100		120										8060	8080	80100		
90	110	90		110		130										9060	9080	90100		
100	120	100	^{+0.107} / _{+0.072}	120	^{+0.076} / _{+0.054}	150	10									10060	10080	100100		
120	140	120		140	^{+0.088} / _{+0.063}	170										12060	12080	120100		